




SYMBOLS



P T B A
MRF-03P




P T B A
MRF-03A



P T B A
MRF-03B




P T B A
MRF-03D



P T B A
MRF-03C


HOW TO ORDER

MRF - 03 P - K - 1 - 30

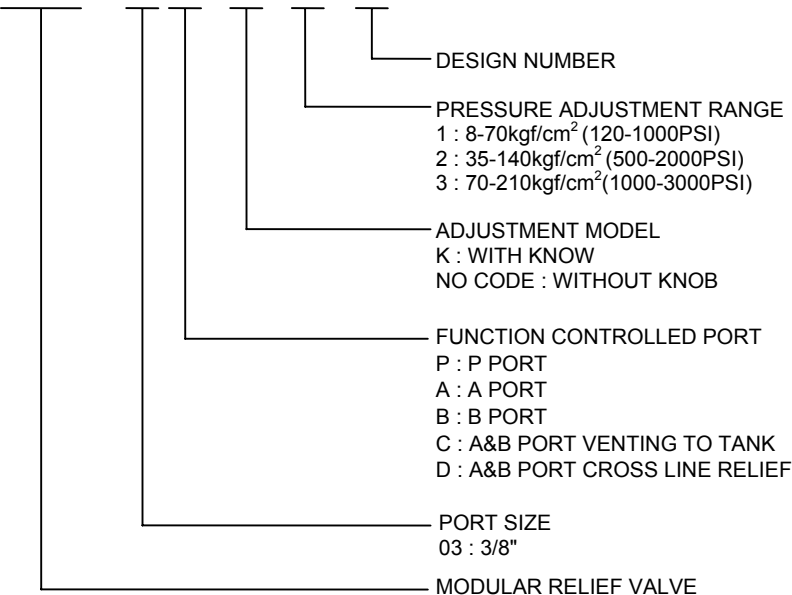

SPECIFICATIONS

MAX. OPERATING PRESSURE	210 kgf/cm ² (3000 PSI)
MAX. FLOW CAPACITY	70 LPM (20 GPM)

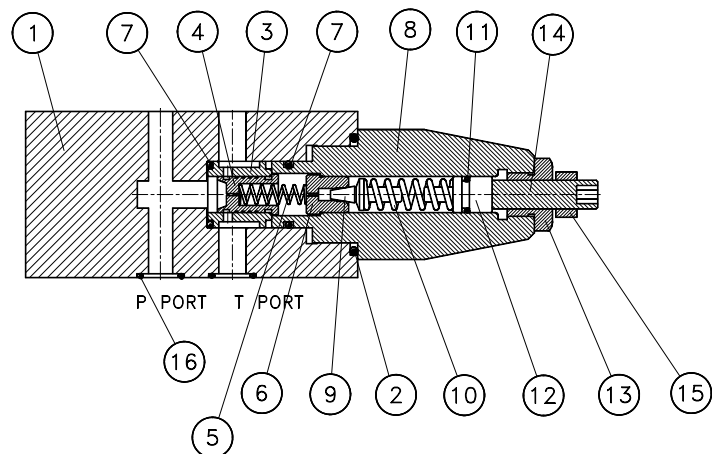

NO.	DESCRIPTION	SPEC.	NO.	DESCRIPTION	SPEC.
2	O-RING	G35(70°)	11	O-RING	P9(70°)
7	O-RING	P18(70°)	16	O-RING	AS568-014(90°)



PERFORMANS CURVES

TEST FLUID VISCOSITY : 35 cSt (175 SSU)

TEST TEMPERATURE : 50°C (122°F)

NOMINAL OVERRIDE
CHARACTERISTICS

MIN. ADJUSTMENT PRESSURE

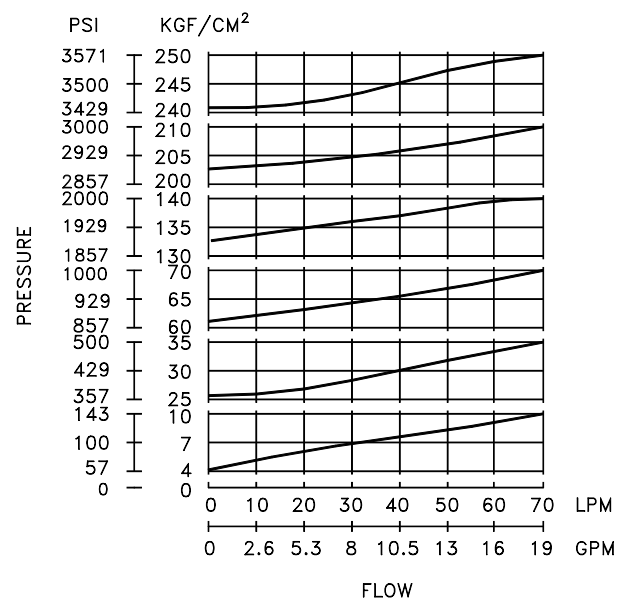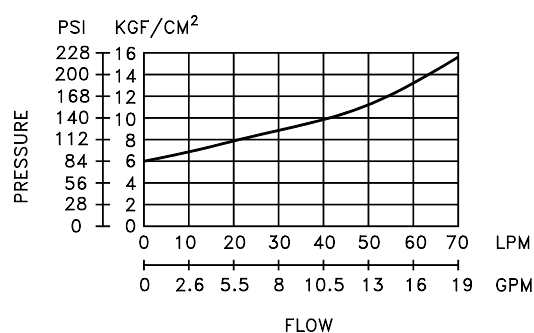


INSTALLATION DIMENSIONS

MRF-03P/A/B-*-30


UNIT: mm(inch)

WEIGHT :3.3kgs(7.28lbs)

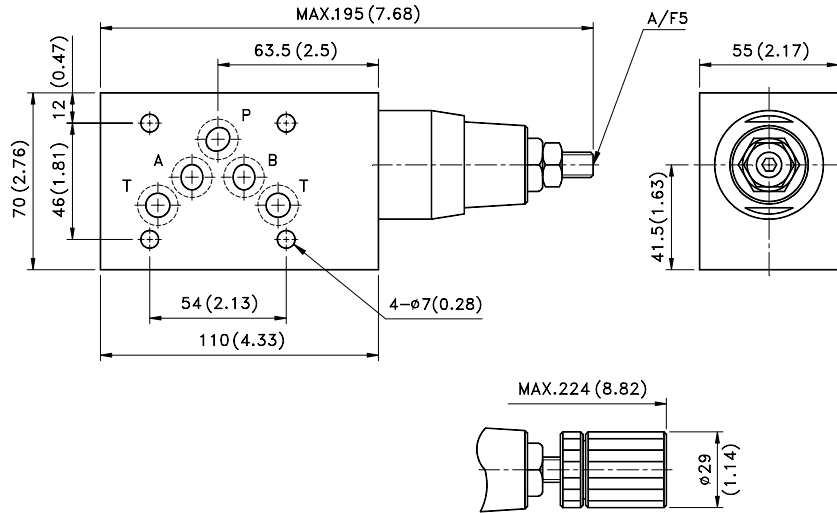

MRF - 03C - * - * - 30

WEIGHT: 3.7 kgs(8.16 lbs)

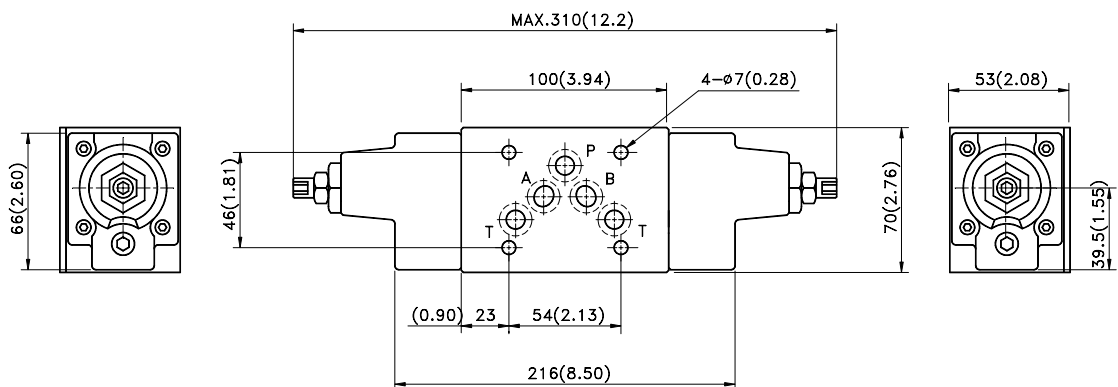

MRF-03 SERIES

MRF - 03D - * - * - 30

